



ALTIMAX SPORT

**THE TOP ATHLETE
IN CURVES**



**ANYWHERE
IS POSSIBLE**

ALTIMAX SPORT

The new Altimax Sport guarantees precise steering response and safe driving on curvy and also on wet roads.

Furthermore the modern silica tread compound bridges the gap between the target conflicts wet performance and rolling resistance.





ALTIMAX SPORT

THE TOP ATHLETE IN CURVES


Series	Size	Load / Speed index			
55	185/55 R 14	80 H*	E	C	70/2
	185/55 R 15	82 H	to be defined		
	185/55 R 15	82 V	to be defined		
	195/55 R 15	85 H	E	C	71/2
	195/55 R 15	85 V	E	C	71/2
	205/55 R 15	88 V	to be defined		
	185/55 R 16	87 H XL*	to be defined		
	195/55 R 16	87 H*	E	C	71/2
	195/55 R 16	87 V	E	C	71/2
	205/55 R 16	91 H	E	C	71/2
	205/55 R 16	91 V	E	C	71/2
	205/55 R 16	94 V XL*	E	C	72/2
	205/55 R 16	91 Y	E	C	71/2
	215/55 R 16	93 V	to be defined		
	215/55 R 16	93 Y	to be defined		
	215/55 R 16	97 Y XL	E	C	71/2
	225/55 R 16	95 V	E	C	71/2
	225/55 R 16	95 Y	E	C	71/2
	225/55 R 16	99 Y XL*	E	C	72/2
	215/55 R 17	94 Y*	E	C	71/2
225/55 R 17	97 Y*	E	C	71/2	
225/55 R 17	101 Y XL	E	C	72/2	
50	195/50 R 15	82 H*	E	C	71/2
	195/50 R 15	82 V	E	C	71/2
	195/50 R 16	88 V XL*	E	C	72/2
	205/50 R 16	87 Y	to be defined		
	225/50 R 16	92 Y	to be defined		
	205/50 R 17	93 V XL FR*	E	C	72/2
	205/50 R 17	93 Y XL FR	to be defined		

Series	Size	Load / Speed index				
50	215/50 R 17	91 Y FR*	to be defined			
	215/50 R 17	95 Y XL FR	to be defined			
	225/50 R 17	94 Y FR*	E	C	71/2	
	225/50 R 17	98 Y XL FR	to be defined			
45	195/45 R 15	78 V FR	E	C	71/2	
	195/45 R 16	84 Y XL FR	E	C	72/2	
	205/45 R 16	87 W XL FR*	to be defined			
	205/45 R 17	88 V XL FR*	to be defined			
	205/45 R 17	88 Y XL FR	to be defined			
	215/45 R 17	91 Y XL FR	to be defined			
	225/45 R 17	91 Y FR	to be defined			
	225/45 R 17	94 Y XL FR	E	C	72/2	
	235/45 R 17	94 Y FR	to be defined			
	235/45 R 17	97 Y XL FR*	to be defined			
40	245/45 R 17	95 Y FR*	E	C	71/2	
	245/45 R 17	99 Y XL FR*	E	C	72/2	
	225/45 R 18	95 Y XL FR*	E	C	72/2	
	235/45 R 18	98 Y XL FR*	to be defined			
	245/45 R 18	100 Y XL FR*	E	C	72/2	
	35	205/40 R 17	84 Y XL FR	to be defined		
		215/40 R 17	87 Y XL FR	to be defined		
		245/40 R 17	91 Y FR	to be defined		
		225/40 R 18	92 Y XL FR	to be defined		
		235/40 R 18	95 Y XL FR	to be defined		
245/40 R 18		93 Y FR*	E	C	71/2	
245/40 R 18		97 Y XL FR	E	C	72/2	
245/40 R 19		98 Y XL FR*	E	C	72/2	
35	255/40 R 19	100 Y XL FR*	E	C	73/2	
	255/35 R 18	94 Y XL FR	to be defined			
	225/35 R 19	88 Y XL FR*	to be defined			
	235/35 R 19	91 Y XL FR	E	C	72/2	
	255/35 R 19	96 Y XL FR	E	C	71/2	
	255/35 R 20	97 Y XL FR*	E	C	73/2	

* = New



- Wide circumferential grooves
- Open shoulder blocks
- Stiff outside shoulder blocks

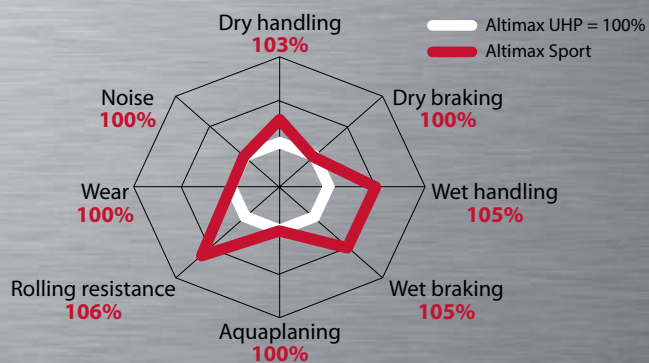

Feature

- Wide circumferential grooves and open shoulder blocks
- Stiff outside shoulder blocks
- Innovative silica tread compound that bridges the gap between the target conflicts wet performance and rolling resistance

Effect

- Faster water dispersion from the contact patch
- Ideal lateral stiffness and optimal stability
- Low deformation and optimal hysteresis

Benefit

- Shorter braking distance
- Precise steering response and safe driving on curvy roads
- Low fuel consumption and high mileage