

GRABBER

AT³ YOUR ACCESS TO
ANY ADVENTURE

ANYWHERE
IS POSSIBLE

Grabber AT³



The all-terrain tyre developed to meet the needs of SUV, pick-up truck and off-road vehicle drivers who want a combination of exceptional off-road capabilities and confident on-road manners.



GENERAL TIRE

SINCE 1915.
GENERAL TIRE. A BRAND OF CONTINENTAL.

WWW.GENERALTIRE.EU

GRABBER AT³ YOUR ACCESS TO ANY ADVENTURE

WELCOME TO GENERAL TIRE'S 3RD GENERATION ALL-TERRAIN TYRE FEATURING 3 TECHNOLOGIES

TRACGEN TCG TECHNOLOGY



Experience exceptional traction

Traction ribs and multi-angled sipes achieve exceptional loose surface traction through gripping edges that interlock with the off-road surface. Open tread shoulder ensures efficient self-cleaning action for added traction in mud.

DURAGEN EG TECHNOLOGY



Go off-road with confidence

Robust compound gives excellent cut and chip resistance. Reinforced tread blocks reduce block deformation. Both improve the tread life in rugged terrain conditions even in high-torque applications and deliver confident stability under all approved load conditions. Ultra high-strength steel belts ensure even footprint for confident stability.

COMFORT BALANCE CB TECHNOLOGY



Enjoy maximum comfort

The uniform block geometry with low stiffness variation leads to an even material distribution and the optimized tread block orientation allows a smooth interaction with the surface and reduced belt excitation. This achieves a considerably comfortable and pleasant on-road drive in an all-terrain tire line.

GRABBER AT³ SIZES HAVE UNIQUE AND BOLD STYLING WITH AGGRESSIVE SIDEWALL DESIGN



Sidewall lugs

Large sidewall lugs on the upper sidewall protect the tire body from stones, rocks and debris.



Deflection ribs

A series of stacked deflection ribs protect the upper sidewall area against penetration by deflecting obstacles away from the tyre body.



Rim protection rib

Rim Protection Rib shields the tyre and wheel bead area from damage caused by curbstones and off-road obstacles.



GRABBER AT³ LT SIZES ARE DESIGNED TO WORK UNDER HEAVY LOAD CONDITIONS AND UNDER HIGH TORQUE ON ROUGH TRAILS



Experience improved stability through enhanced tread stiffness thanks to the large tread blocks and optimized siping.




Benefit from even wear through a wide, flat tread contour providing uniform pressure distribution and uniform abrasion.




Drive with confidence with thick sidewall lugs that protect the tyre body helping to prevent sidewall failures.

TYRE PERFORMANCE GRABBER AT³ VS GRABBER AT

On-Road Performance:

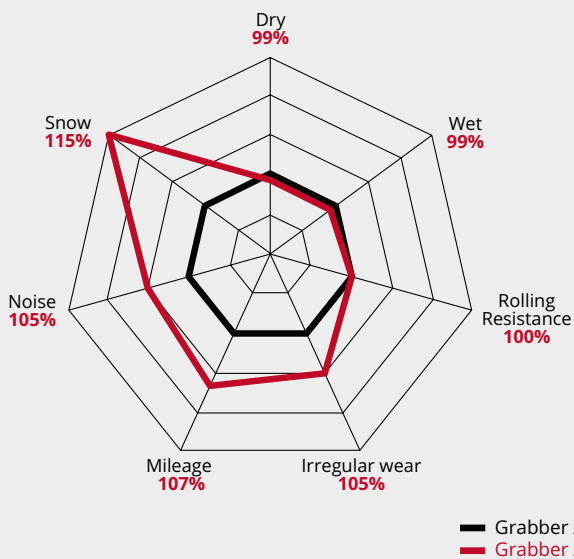

Off-Road Performance:

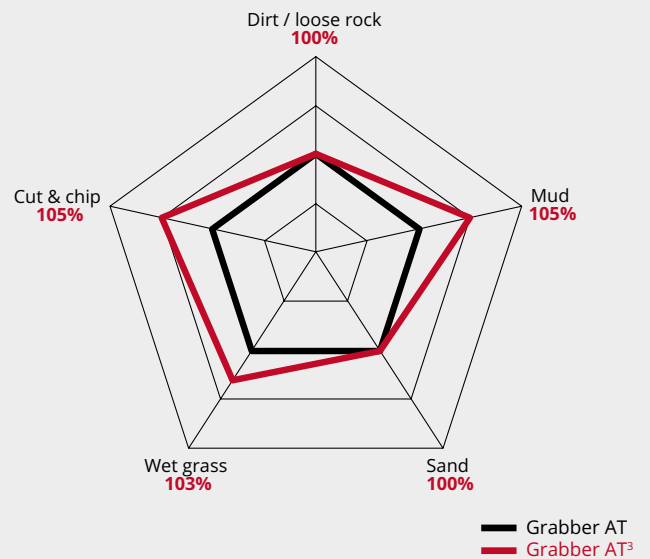



GRABBER AT³ YOUR ACCESS TO ANY ADVENTURE

Rim diameter	Size ¹⁾	Load / Speed index / Extra Load / Load Range	Sidewall	Permitted rim widths (in inch)	Tyre dimensions		Rolling circumference (mm) + 1.5% - 2.5%
					Max. standard value in operation width (mm)	outer diameter (mm)	
15"	195/80 R 15	96T	BSW	5.0 - 6.5	204	705	2114
	LT215/80 R 15	112/109S LRE	BSW	5.5 - 7.0	225	739	2197
	205/75 R 15	97T	BSW	5.0 - 7.0	211	701	2101
	215/75 R 15	100T	BSW	5.0 - 7.0	225	715	2144
	225/75 R 15	102T	BSW	6.0 - 7.5	232	733	2193
	LT235/75 R 15	110/107S LRD	OWL	6.0 - 7.0	249	747	2253
	LT245/75 R 15	113/110S LRD	BSW	6.5 - 7.5	258	763	2269
	205/70 R 15	96T	BSW	5.0 - 7.0	217	681	2040
	LT205/70 R 15	107/103S LRE	BSW	5.5 - 6.5	217	681	2027
	225/70 R 15	100T	BSW	6.0 - 7.5	237	709	2126
	255/70 R 15	112T XL	BSW	6.5 - 8.5	270	753	2254
	265/70 R 15	112T	BSW	7.0 - 9.0	283	767	2297
	31 X 10.50 R 15LT	109S LRC	OWL	7.0 - 9.0	289	797	2386
16"	LT235/85 R 16	120/116S LRE	OWL	6.0 - 7.5	249	822	2478
	205 R 16C	110/108S LRD	BSW	5.5 - 6.5	216	750	2230
	205/80 R 16	104T XL	BSW	5.0 - 7.0	211	748	2239
	225/75 R 16	108H XL	BSW	6.0 - 7.0	236	758	2254
	LT225/75 R 16	115/112S LRE	OWL	6.0 - 7.0	236	758	2254
	LT245/75 R 16	120/116S LRE	OWL	6.5 - 8.0	263	788	2345
	LT265/75 R 16 ²⁾	123/120S LRE	OWL	7.0 - 8.0	283	820	2436
	LT285/75 R 16 ²⁾	126/123S LRE	OWL	7.5 - 9.0	303	852	2527
	215/70 R 16	100T	BSW	5.5 - 7.0	230	720	2159
	225/70 R 16	103T	BSW	6.0 - 7.5	237	734	2202
	LT235/70 R 16	110/107S LRD	OWL	6.0 - 7.5	250	750	2245
	245/70 R 16	111H XL	BSW	6.5 - 8.0	258	764	2288
	LT245/70 R 16	113/110S LRD	OWL	6.5 - 7.5	258	764	2273
	LT255/70 R 16	120/117S LRE	OWL	6.5 - 8.0	270	778	2330
	265/70 R 16	112H	BSW	7.0 - 9.0	283	792	2373
LT265/70 R 16	121/118S LRE	OWL	7.0 - 8.5	283	792	2357	
LT215/65 R 16	103/100S LRD	BSW	6.0 - 7.0	230	698	2079	
255/65 R 16	109H	BSW	7.0 - 9.0	270	752	2251	
235/60 R 16	100H	BSW	6.5 - 8.5	250	700	2098	
17"	225/70 R 17	108T XL	BSW	6.0 - 7.5	237	748	2281
	235/70 R 17	111H XL	BSW	6.0 - 8.0	250	776	2324
	245/70 R 17	114T XL	BSW	6.5 - 8.0	258	790	2367
	265/70 R 17	115T	BSW	7.0 - 9.0	283	818	2452
	LT265/70 R 17	121/118S LRE	OWL	7.0 - 8.5	288	818	2470
	225/65 R 17	102H	BSW	6.0 - 8.0	237	736	2208
	235/65 R 17	108H XL	BSW	6.5 - 8.5	250	750	2251
	235/65 R 17	108V XL	BSW	6.5 - 8.5	250	750	2251
	245/65 R 17	111H XL	BSW	7.0 - 8.5	258	762	2288
	LT255/65 R 17	114/110S LRD	BSW	t.b.d. ³⁾	t.b.d. ³⁾	t.b.d. ³⁾	t.b.d. ³⁾
	265/65 R 17	112H	BSW	7.5 - 9.5	283	790	2367
	LT265/65 R 17	120/117S LRE	OWL	7.5 - 9.5	283	790	2367
	215/60 R 17	96H	BSW	6.0 - 7.5	230	700	2105
235/55 R 17	99H	BSW	6.5 - 8.5	255	700	2105	
18"	265/65 R 18	114T	BSW	7.5 - 9.5	283	815	2443
	235/60 R 18	107H XL	BSW	6.5 - 8.5	250	751	2254
	255/60 R 18	112H XL	BSW	7.0 - 9.0	270	775	2327
	LT255/60 R 18	112/109S LRD	BSW	t.b.d. ³⁾	t.b.d. ³⁾	t.b.d. ³⁾	t.b.d. ³⁾
	265/60 R 18	110H	BSW	7.5 - 9.5	283	787	2364
	285/60 R 18	116H	BSW	8.0 - 10.0	304	813	2437
	235/55 R 18	104H XL	BSW	6.5 - 8.5	255	725	2181
	255/55 R 18	109H XL	BSW	7.0 - 9.0	276	749	2248
19"	235/55 R 19	105H XL	BSW	6.5 - 8.5	255	751	2260
	255/55 R 19	111H XL	BSW	7.0 - 9.0	276	775	2327
	255/50 R 19	107H XL	BSW	7.0 - 9.0	276	749	2254
20"	275/60 R 20	115H	BSW	7.5 - 9.5	290	852	2556
	255/55 R 20	110H XL	BSW	7.0 - 9.0	276	800	2403
	275/55 R 20	117H XL	BSW	7.5 - 9.5	295	822	2471
	275/45 R 20	110H XL	BSW	9.0 - 11.0	289	736	2220
	275/45 R 20	110V XL	BSW	9.0 - 11.0	289	736	2220
	275/40 R 20	106H XL	BSW	9.0 - 11.0	289	736	2220
	275/40 R 20	106V XL	BSW	9.0 - 11.0	289	736	2220
AT2 16"	LT265/75 R 16	123/120S LRE	BSW	7.0 - 8.0	283	820	2436
	LT285/75 R 16	126/123S LRE	BSW	7.5 - 9.0	303	852	2527

¹⁾ all sizes with rim protection (FR), ²⁾ 2 not for Europe, ³⁾ to be defined, ⁴⁾ EU label to be defined